



















Technical Specifications


Models	SD8314E/SD8324E (18x zoom) SD8316E/SD8326E (36x zoom)
System Information	
CPU	Multimedia SoC (System-on-Chip)
Flash	128 MB
RAM	256 MB
Camera Features	
Image Sensor	1/4" Progressive CCD
Maximum Resolution	720x480/NTSC (SD8314E/16E) 720x576/PAL (SD8324E/26E)
Lens Type	18x Optical Zoom (SD8314E/24E) 36x Optical Zoom (SD8316E/26E) Auto Focus
Focal Length	f = 4.1 ~ 73.8 mm (SD8314E/24E) f = 3.4 ~ 122.4 mm (SD8316E/26E)
Aperture	F1.4 ~ F3.0 (SD8314/24E) F1.6 ~ F4.5 (SD8316/26E)
Auto-iris	DC-iris
Field of View	SD83x4E: 3° ~ 48° (Horizontal) 2° ~ 37° (Vertical) 4° ~ 58° (Diagonal) SD83x6E: 2° ~ 58° (Horizontal) 1° ~ 44° (Vertical) 2° ~ 70° (Diagonal)
Shutter Time	1 sec. to 1/10,000 sec.
WDR Technology	WDR Pro
Day/Night	Removable IR-cut filter for day & night function
Minimum Illumination	0.01 Lux @ F1.4, 50IRE (Color) 0.001 Lux @ F1.4, 50 IRE (B/W) (SD8314E/24E) 0.01 Lux @ F1.6, 50IRE (Color) 0.001 Lux@F1.6, 50 IRE (B/W) (SD8316E/26E)
Pan Speed	0.05° ~ 450° / sec
Pan Range	360 endless
Tilt Speed	0.05° ~ 450° / sec
Tilt Range	220° (-110° ~ +110°)
Preset Locations	256 preset locations
Pan/tilt/zoom Functionalities	48x digital zoom (4x on IE plug-in, 12x built-in) Auto pan mode Auto patrol mode SD/SDHC/SDXC card slot
On-board Storage	
Video	
Compression	H.264, MJPEG, MPEG-4
Maximum Frame Rate	30 fps @ 720x480 (SD8314E/16E) 25 fps @ 720x576 (SD8324E/26E) In all compression modes
Maximum Streams	4 simultaneous streams
S/N Ratio	Above 48 dB
Dynamic Range	72 dB
Video Streaming	Adjustable resolution, quality and bitrate
Image Settings	Adjustable image size, quality and bit rate Time stamp, text overlay, flip & mirror Configurable brightness, contrast, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks (Up to 24) Scheduled profile settings Electrical Image Stabilizer (SD8316E/26E)
Audio	
Audio Capability	Two-way Audio (full duplex)
Compression	GSM-AMR, AAC, G.711, G.726
Interface	External microphone input External line output
Network	
Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X
Interface	10Base-T/100 BaseTX Ethernet (RJ-45)
ONVIF	Supported, specification available at www.onvif.org

Compatible Accessories

Mounting Kits											
	AM-103 Recessed kit		AM-116 20 cm pendant pipe		AM-117 40 cm pendant pipe		AM-118 Indoor pendant head		AM-231 Parapet mounting kit		AM-221 Goose neck mounting kit
Mounting Kits								Power Adapter			
	AM-311 Pole Mount Adaptor		AM-411 Corner Mount Adaptor		AM-711 Junction Box		AM-114 Outdoor pendant Head		AM-519 1.5" PT adapter		AA-341 AC 24V power adapter
PoE Kits				Others							
	AP3001 PoE plus injector		AP-331 High power PoE injector		AC-212 Smoked cover		AC-111 Vandal-proof transparent cover		AO-001 Combo cable		IPD-USB USB Joystick

Intelligent Video	
Video Motion Detection	Triple-window video motion detection
Auto-Tracking	Auto-tracking on moving object
Alarm and Event	
Alarm Triggers	Video motion detection, manual trigger, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
General	
Connectors	RJ-45 cable connector for Network/PoE connection Audio input Audio output AC 24V power input DC 12V power input Digital input*4 Digital output*2 RS-485 for PTZ control (PelcoD protocol, Baud rate 2400)
LED Indicator	System power and status indicator
Power Input	PoE Plus (IEEE 802.3at compliant) High Power PoE AC 24V
Power Consumption	PoE Plus: Max. 19W AC 24V: Max. 48W (heater on) Max. 19W (heater off) High Power PoE: Max. 48W (heater on) Max. 19W (heater off)
Dimensions	Ø: 205 mm x 321 mm
Weight	Net: 3,660 g
Casing	Weather-proof IP66- and NEMA 4X-rated housing
Safety Certifications	CE, FCC Class A, VCCI, C-tick, NEMA 4X
Operating Temperature	-5°C ~ 55°C (PoE Plus) -40°C ~ 55°C (AC 24V) -40°C ~ 55°C (High Power PoE) 36 months
Warranty	
System Requirements	
Operating System	Microsoft Windows 7/Vista/XP/2000
Web Browser	Mozilla Firefox 7~10 (Streaming only) Internet Explorer 7.x or 8.x
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
Included Accessories	
CD	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
Others	Wall mount bracket, screws, waterproof connectors, terminal blocks, Ethernet cable, quick installation guide, warranty card, alignment sticker, T25 star driver, software CD, desiccant bag, ground wire

Dimensions

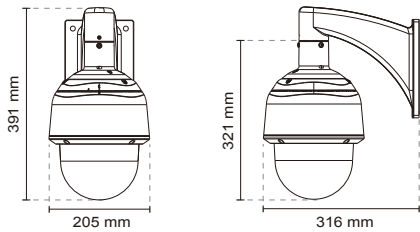

Speed Dome
Network Camera
SD83x4/x6E



D1 • 18x/36x Zoom • NEMA 4X • IP66 •
Extreme Weatherproof • PoE Plus

VIVOTEK SD8314E/24E/16E/26E is part of the SUPREME series product line offering D1 resolution with superb image quality. Adopting a 18x/36x optical zoom lens, the SD8314E/24E/16E/26E is able to capture details at top-notch quality. The IP66- and NEMA 4X-rated housing protects the camera body against rain, dust, and corrosion within a wide temperature range of between -40°C to 55°C. This feature ensures operation under extreme weather conditions and hazardous environments. It is especially suitable for monitoring wide open indoor/outdoor spaces such as airports, highways and parking lots where high-level reliability and precision are always required.

The SD8314E/24E/16E/26E supports high-performance H.264/MPEG-4/MJPEG compression technology and offers extra smooth video quality with resolution up to 30 fps @ D1. Boasting WDR Pro Technology, the SD8314E/24E/16E/26E can also cope with challenging lighting conditions and generate image quality close to the capabilities of the human eye. With a sophisticated pan/tilt mechanism, the camera provides fast, precise movement with continuous 360-degree pan and 220-degree tilt. Users can also easily control the lens position via a mouse or a joystick to track the object of interest and set up to 256 preset positions for patrolling. With the built-in auto tracking feature, the SD8314E/24E/16E/26E provides instantaneous reaction to suspicious moving objects in wide area locations before operators are aware of activity.

As with all VIVOTEK true day/night cameras, the SD8314E/24E/16E/26E features a removable IR-cut filter, maintaining clear images 24 hours a day. With audio detection, by recognizing increases or decreases in sound volume, an additional layer of intrusion detection is ensured. With other advanced features such as SD/SDHC/SDXC card slot, 802.3at compliant PoE Plus and 30 fps high quality video, the SD8314E/24E/16E/26E is the best choice for the most demanding outdoor surveillance applications.

All specifications are subject to change without notice. Copyright © 2013 VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
| T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com

VIVOTEK USA, INC.
2050 Ringwood Avenue, San Jose, CA 95131
| T: 408-773-8686 | F: 408-773-8298 | E: salesusa@vivotek.com

Ver 1.0

SUPREME

Detailed Images of Distant Objects

Utilizing a 18x/36x optical zoom lens, the SD8314E/24E (18x), SD8316E/26E (36x) provides close-up images with exceptional detail and effectively extends the user's viewing distance. Users can easily and quickly zoom in on distant objects or minute details with precision and quality, even at from far away.




Advanced Mechanism

SD8314E/24E/16E/26E has a pan range of 360° and tilt range of 220°. With the additional 20° tilt range, the SD8314E/24E/16E/26E is able to expand the viewing range to the field above the normal horizontal view. Additionally, the SD8314E/24E/16E/26E is built with QuickPan technology, allowing for 360° endless panning at a speed of 450° per second. This allows users to quickly direct the camera lens to catch any object of interest in the field of view surrounding the camera.




Auto Tracking for Moving Objects

The auto tracking feature provides instantaneous reaction to suspicious moving objects over a wide area before an operator may be aware of activity. Users are able to define the target object size in order to render auto tracking more effectively.

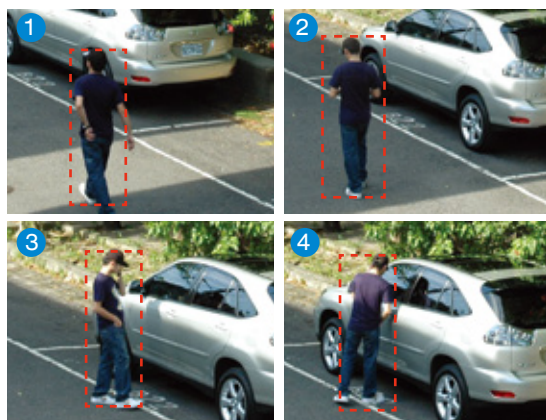


Clear Images 24/7

The SD8314E/24E/16E/26E deliver day & night functionality with a built-in removable IR-cut filter. By day, the IR-cut filter screens out infrared light to reduce color distortion, and at night, the filter is removed to accept infrared light for higher lighting efficiency.

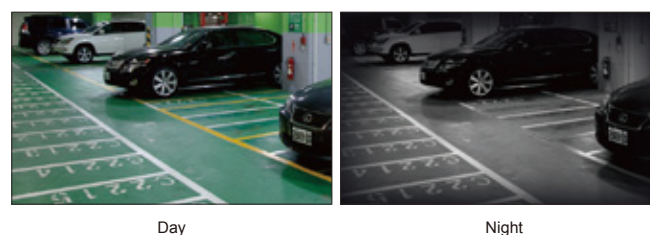

Audio Detection for Instant Alerts

The audio detection feature enables an event trigger when a sudden, unexpected increase or decrease in sound volume occurs so as to alert users of a possible emergency situation.

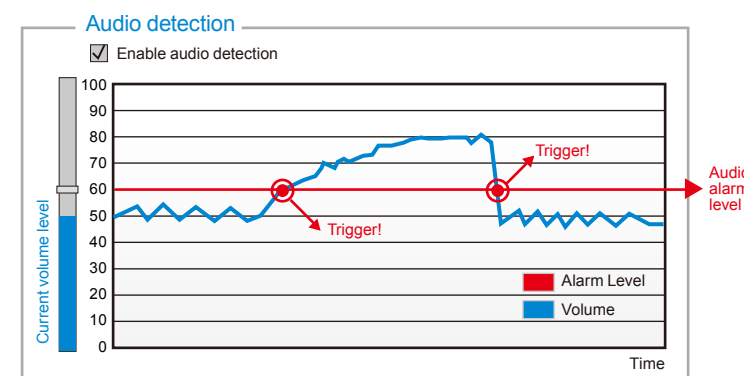


Unparalleled Visibility in High Contrast Environments

When a camera is used in a high contrast, backlight, glare or light reflective environment, such as a building entrance, ATM or window, an object may appear dark and unrecognizable. WDR (Wide Dynamic Range) technology compensates for the unbalanced lighting, restoring the details throughout the field of view. With this feature, the SD8314E/24E/16E/26E is able to maintain image quality even under challenging light conditions.

• WDR Pro

WDR Pro works by capturing alternate frames using different exposure times. An image signal processor (ISP) then uses a sophisticated algorithm to seamlessly combine the optimal portions of these two complementary frames to create a composite frame that retains details in both the dark and bright areas of the field of view.

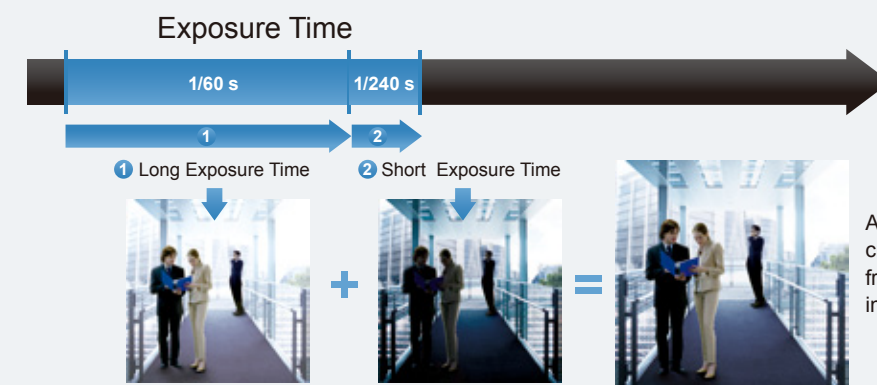

Extreme Weatherproof

• Wide Temperature Range

The wide temperature range (-40°C ~ 55°C) enhances the SD8314E/24E/16E/26E's performance and reliability under extremely harsh weather conditions.



• IP66-rated and NEMA 4X Housing

The weather-proof IP66- and NEMA 4X-rated housing protects the camera from rain, dust, and corrosion, allowing the device to operate outdoors under a multitude of weather conditions.



SD83x4E/x6E | Speed Dome Network Camera

- D1 SONY Exview HAD CCD Sensor
- 30 fps @ D1
- 18x / 36x Zoom Lens
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Removable IR-cut Filter for Day & Night Function
- 360° Continuous Pan and 220° Tilt
- Real-time H.264, MPEG-4 and MJPEG Compression (Triple Codec)
- Weather-proof IP66-rated and NEMA4X Housing
- -40°C ~ 55°C Wide Temperature Range for Extreme Weather Conditions
- Audio Detection for Instant Alerts
- Auto tracking for Moving Objects
- Built-in 802.3at Compliant PoE Plus
- 3D Privacy Masks for Additional Protection
- Built-in SD/SDHC/SDXC Card Slot for On-board Storage



ONVIF